

PRODUKTDATENBLATT

KFK


TOP LINE ●●●

Backing type Vulcanised fibre
Bond Synthetic resin
Grain type Ceramic grain

- Especially suitable for hardened and tempered steels, tinner areas and titanium
- Noticeable faster stock removal
- Long lifetime

Ceramic grain fibre disc – the grain enables superior stock removal performance in a short period of time with a very long lifetime.

i For use only on matching RH TURBO and RH ST backing pads – see page 71

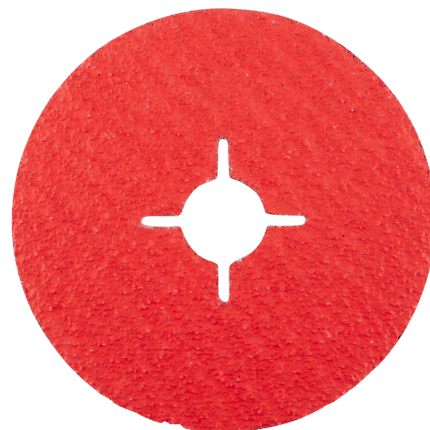

Typenbezeichnung	KFK
Artikelbezeichnung 1	Fibre disc
Artikel-Nr.	303325
GTIN	4011890066140
Inhaltsmenge	25
Inhaltseinheit	Piece
Gewicht	0.022 kg
Produktabmessung	115 x 22,23
Durchmesser 1	115 mm
Bohrung	22.23 mm
Körnung SU	24
Filzhärte (H) / Lamellendicke (D)	/
Unterlage	Vulcanised fibre
Kornart	Ceramic grain
Bindung	Synthetic resin
Arbeitsgeschwindigkeit	80 m/s
maximale Drehzahl	13,300 U/min
Materialeignung	Stainless steel Steel

Maschineneignung	Freehand angle grinder
Technologien	CERAMICON
Brancheneignung des Artikels	Plant construction Building fitter's shop Boiler and container construction Vehicle construction Structural steel construction Foundry and dressing shop Pipeline construction Container construction Shipyards
Produktkategorie-Nummer	PK06
Produktkategorie-Text	SU
GTIN-Code Verpackungseinheit	4011890115114
Verpackungsart	Carton
Verpackungseinheit	1
Länge Verpackung	120 mm
Breite Verpackung	120 mm
Höhe Verpackung	50 mm
Gewicht-Verpackungseinheit	0.550 kg
Zolltarifnummer	68053000
Herkunftsland	DE